


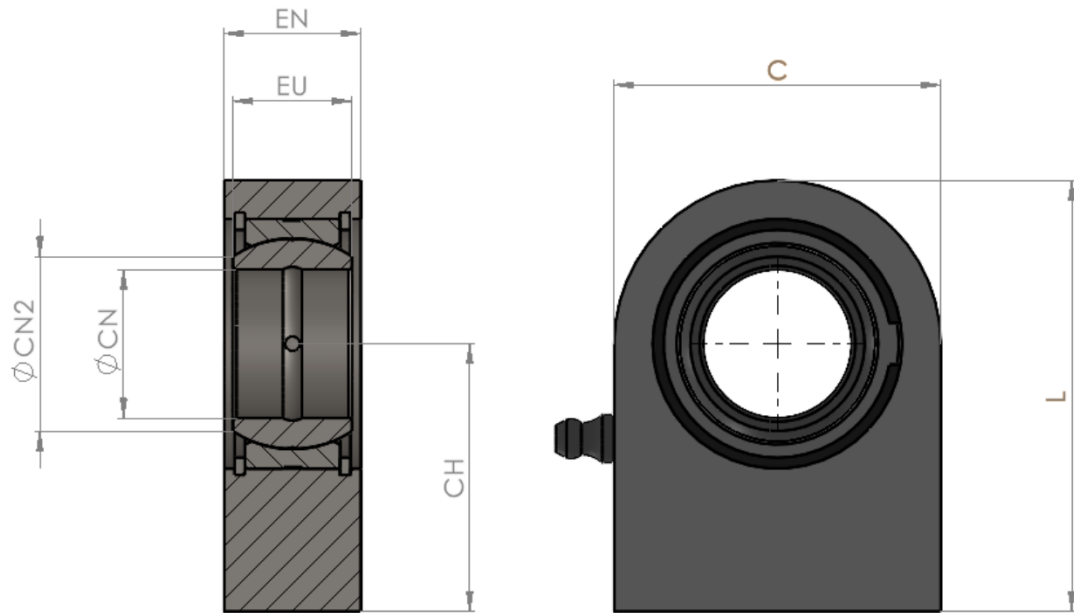

Designation	L	C	CH	CN	CN2	EN	EU	static Load rating C(kN)	dynamic Load rating C (kN)	Radial play (mm)	Swivel angle	Weight (kg)
GF-16-DO	59	48	35	16	20	17,5	14	60	25	0,040-0,082	9°	0,3
GF-20-DO	63	50	38	20	24,1	19	16	67	30	0,030-0,082	9°	0,36
GF-25-DO	72,5	55	45	25	29,3	23	20	69,5	48	0,037-0,100	7°	0,53
GF-30-DO	83,5	65	51	30	34,2	28	22	118	62	0,037-0,100	6°	0,85
GF-35-DO	102,5	83	61	35	39,7	30	25	196	80	0,037-0,100	6°	1,5
GF-40-DO	119	100	69	40	45	35	28	305	100	0,043-0,120	7°	2,42
GF-45-DO	132	110	77	45	50,7	40	32	386	127	0,043-0,120	7°	3,39
GF-50-DO	149,5	123	88	50	56	40	35	441	156	0,043-0,120	6°	4,24
GF-60-DO	170	140	100	60	66,8	50	44	570	245	0,043-0,120	6°	7,1
GF-70-DO	197	164	115	70	77,8	55	49	724	315	0,055-0,142	6°	10,7
GF-80-DO	231	180	141	80	89,4	60	55	804	400	0,055-0,142	6°	15,1
GF-90-DO	263	226	150	90	98,1	65	60	1340	490	0,055-0,142	5°	23,4
GF-100-DO	295	250	170	100	109,5	70	70	1516	610	0,065-0,165	7°	33,1
GF-110-DO	332,5	295	185	110	121,2	80	70	2340	655	0,065-0,165	6°	48,5
GF-120-DO	390	360	210	120	135,5	90	85	3210	950	0,065-0,165	6°	79,5